

SCALE : NTS

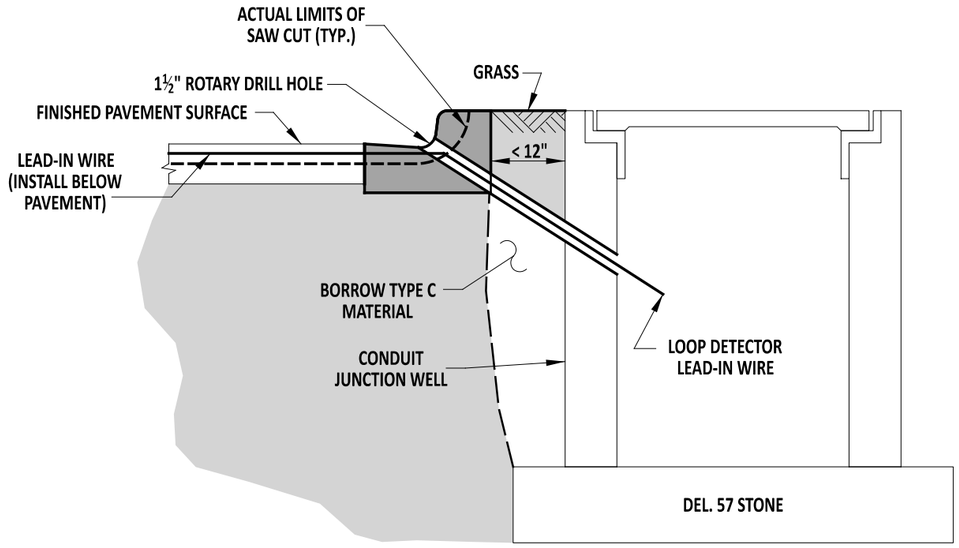

LOOP DETECTOR LEAD-IN WIRE INSTALLATION

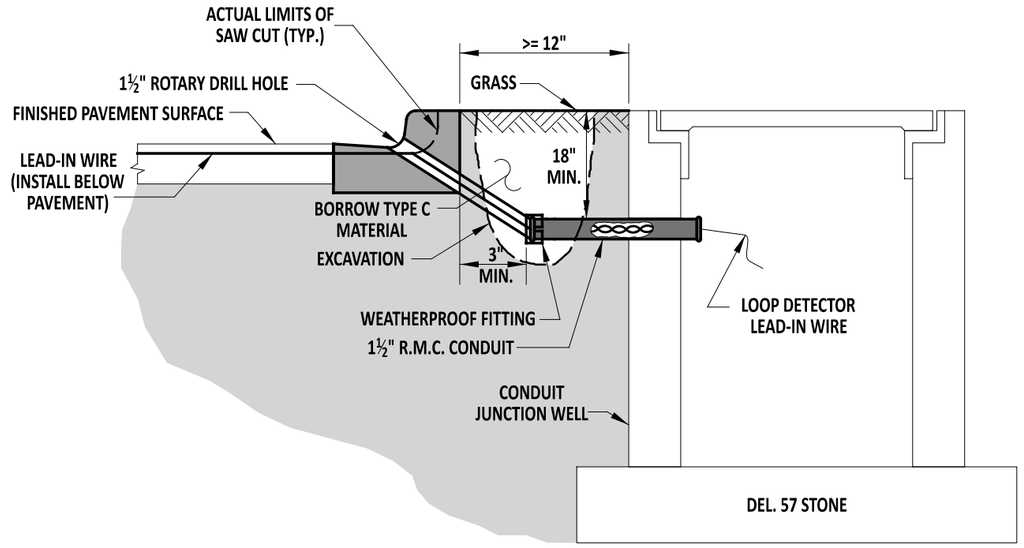

LOOP DETECTOR LEAD-IN WIRE INSTALLATION

NOTES:

1). ALL SAWCUTS SHALL BE A DEPTH OF 3½" ON ALL SURFACES.
2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 ½".
5). CONTRACTOR SHALL INSTALL DETECTABLE WARNING TAPE IN TRENCH FOR LEAD-IN CONDUIT.

DelDOT

ENGINEERING SUPPORT — 09/01/2020 DATE

RECOMMENDED

LOOP DETECTOR LEAD-IN WIRE INSTALLATION - JUNCTION WELL BEHIND CURB OR CURB AND GUTTER WITH GRASS STRIP

STANDARD NO. T-8 (2020) | SHT. 1 OF 4

REVIEWED — DEPUTY DIRECTOR - DESIGN — 09/01/2020 DATE

APPROVED — CHIEF ENGINEER — 09/01/2020 DATE

08/21/2020